

IT-A Series

Pequeños / Medianos eventos Lugares de culto Teatros Discotecas
Small / Medium events Houses of worship Theaters Night clubs



100 %
Made in
Europe



IT-A 115 F

Ultra compacto subwoofer de alto rendimiento
Ultra Compact High Performance subwoofer





IT-A 115 F

Ultra compacto subwoofer de alto rendimiento / Ultra Compact High Performance subwoofer.

Una nueva generación.

La Serie IT-A es la última generación de productos para instalación y touring autoamplificados de Pro DG Systems. IT-A 115 F es el perfecto sistema para utilizarse como refuerzo de graves en pequeños y medianos eventos. Tanto para touring como para instalación permanente.

IT-A 115 F es lo suficientemente compacto y potente para el concierto en directo y discotecas, así como todo tipo de instalaciones "indoor", además de ser un actor destacado en producciones teatrales y eventos corporativos.

A new generation.



The IT-A Series is the last self-powered systems generation for installation and touring from Pro DG Systems. IT-A 115 F is the perfect system to be used as low or deep in small and medium events. It can be used for touring or for permanent set up. IT-A 115 F is compacted and powerful enough for concerts and night clubs, as well as indoor setups. Finally it has been extensively used in theater productions and corporate events.

DETALLES & BENEFICIOS DETAILS & BENEFITS

- *Pequeño tamaño, gran rendimiento / Small size, high performance.*
- *Excelente como refuerzo de graves / Excellent as a reinforce for deep tunes.*
- *Fácil integración con todos los sistemas de la Serie IT-A / Flexible integration with all systems from Pro DG Systems IT-A Series.*

APLICACIONES / APPLICATIONS

- Pequeños - Medianos eventos / Small - Medium events.
- Lugares de culto / Houses of worship.
- Teatros / Theaters.
- Eventos "indoor" / Indoor events.

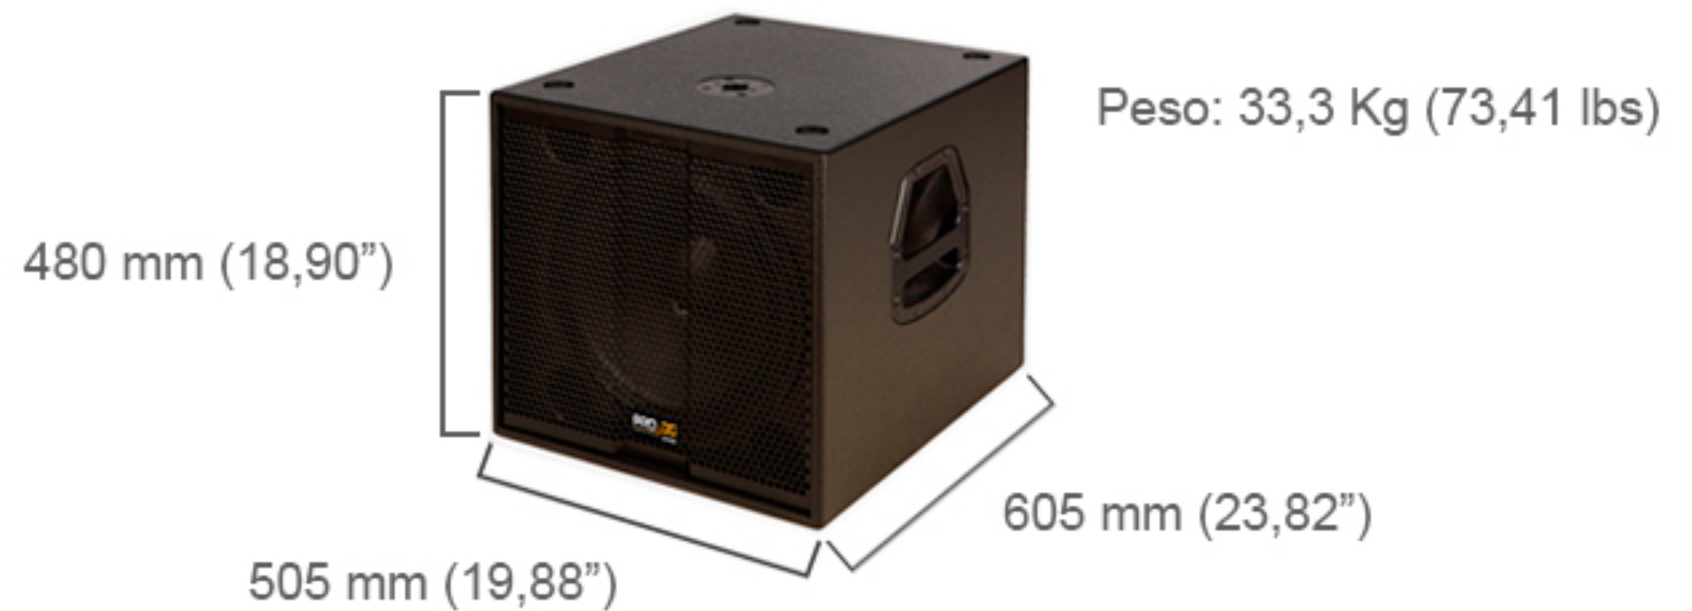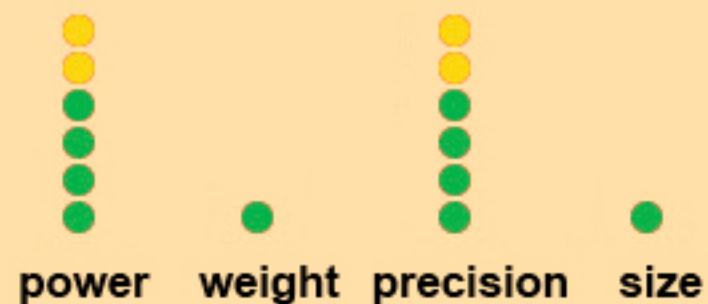

Excelente para pequeña P.A. Teatros, lugares de culto y eventos "indoor" donde precisemos un óptimo rendimiento y SPL. Simplemente el mejor de su rango gracias a su increíble relación potencia-tamaño. El mejor rendimiento, servicio y asesoramiento técnico al detalle, junto con la fácil adquisición de repuestos permiten garantizar el éxito del profesional en todos sus eventos. IT-A 115 F es un sistema autoamplificado tremendamente poderoso con una potencia máxima de pico de 131 dB, ideal como refuerzo de graves para toda la Serie IT-A.

Excellent for small P.A. Theaters, houses of worship and indoor events where we could use high performance and SPL. Simply the best thanks to its power and size relationship. The best performance, the best service and technical assessment to detail with the easy purchase of its spare parts guarantee professional achievement in all events. IT-A 115 F is a extremely powerful self-powered system with a maximum peak power handling of 131 dB, ideal as bass reinforcement for all the IT-A Series.


IT-A 115 F sistema subwoofer autoamplificado, equipado con un altavoz de 15" en un recinto sintonizado. Ideal como refuerzo de graves para la Serie IT-A. La configuración del transductor, al tratarse de un subwoofer, genera una proyección de audio omnidireccional.

IT-A 115 F is a self-powered subwoofer system equipped with one (1) speaker of 15" in a tuned enclosure. Excellent as bass reinforcement for all the IT-A Series. Since it is a subwoofer, the transducer configuration generates an omnidirectional audio projection.


ESPECIFICACIONES ACUSTICAS / ACOUSTIC SPECIFICATIONS

Power Handling:	600 W RMS (EIA 426A Standard). Programme of 1200 W / 2400 W peak.
Nominal Impedance:	8 Ohm (8.8 Ohm mínimo a 46 Hz)
Average Sensitivity:	99 dB / 2.83 V/1m (average of 50 - 1000 Hz wideband).
Calculated Maximum SPL:	/ 1m 125 dB continuous / programme of 128 dB / 131 dB peak.
Frequency Response:	(-6 dB) 40 Hz - 2500 Hz.
Frequency Range:	± 3 dB from 100 to 1000 Hz.
Nominal Directivity:	Omnidirectional.
Low Frequency Driver:	One (1) Beyma speaker of 15", 8 Ohm, 600 W, 406 mm in diameter with high temperature, glass fiber voice coil.
Recommended Amplifier:	Pro DG Systems GT 1.2 V into the cabinet.
Connectors:	2 X XLR +1 NL4MP speakon connectors. USB - Ethernet + 2 X Powercom.
Acoustic Box:	CNC model, 15 mm made from birch wood plated on the exterior.
Finish:	Standard black paint job.
Box Dimensions:	(HxWxD); 480x505x605mm (18,90"x19,88"x23,82").
Weight:	33,3 Kg (73,41 lbs) net weight / 34,5 Kg (76,06 lbs) gross with packaging.

ARQUITECTURAL / ARCHITECTURAL

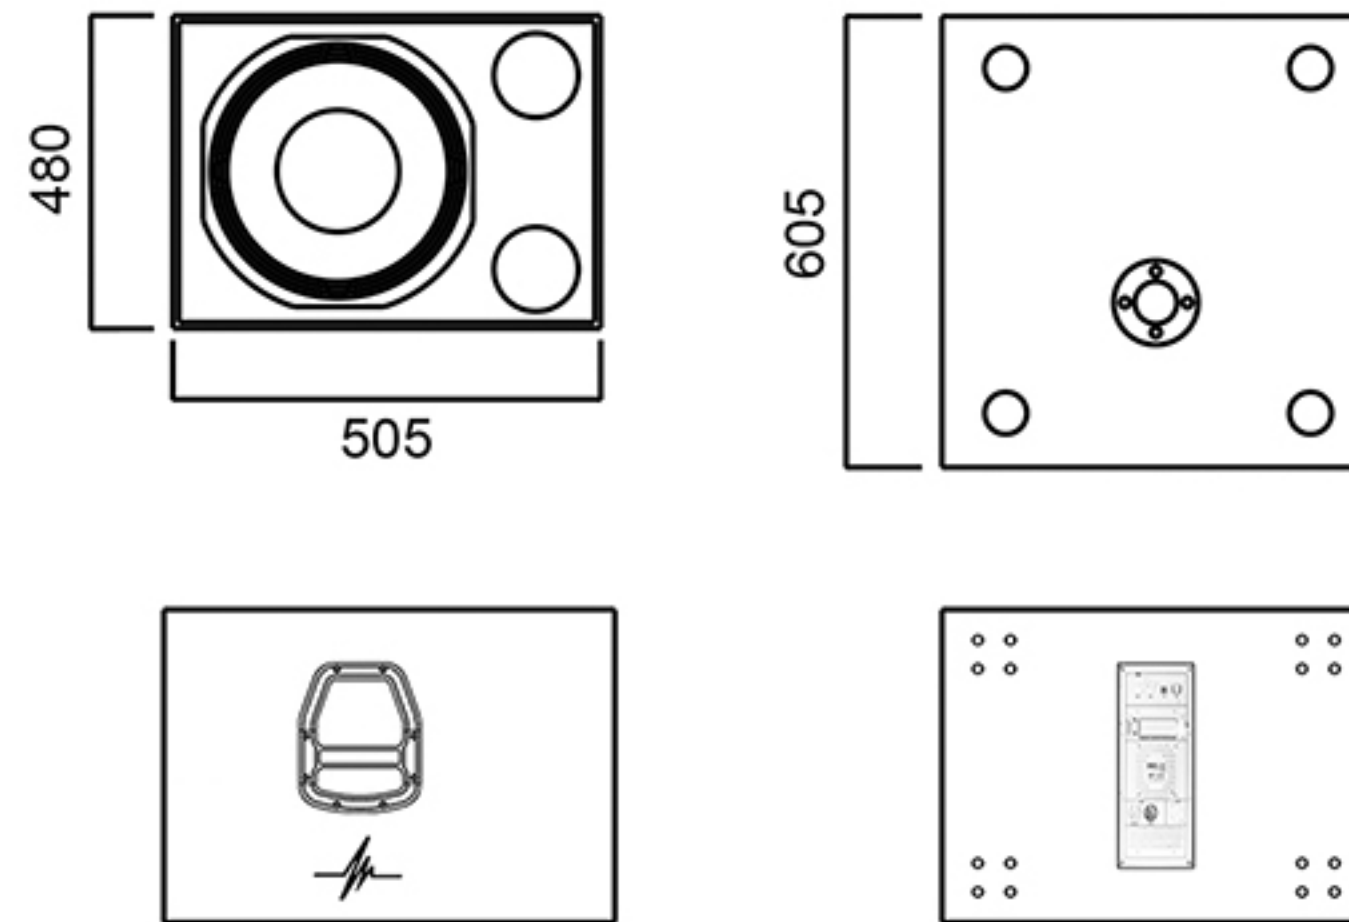

Respuesta de Frecuencia / Frequency Response

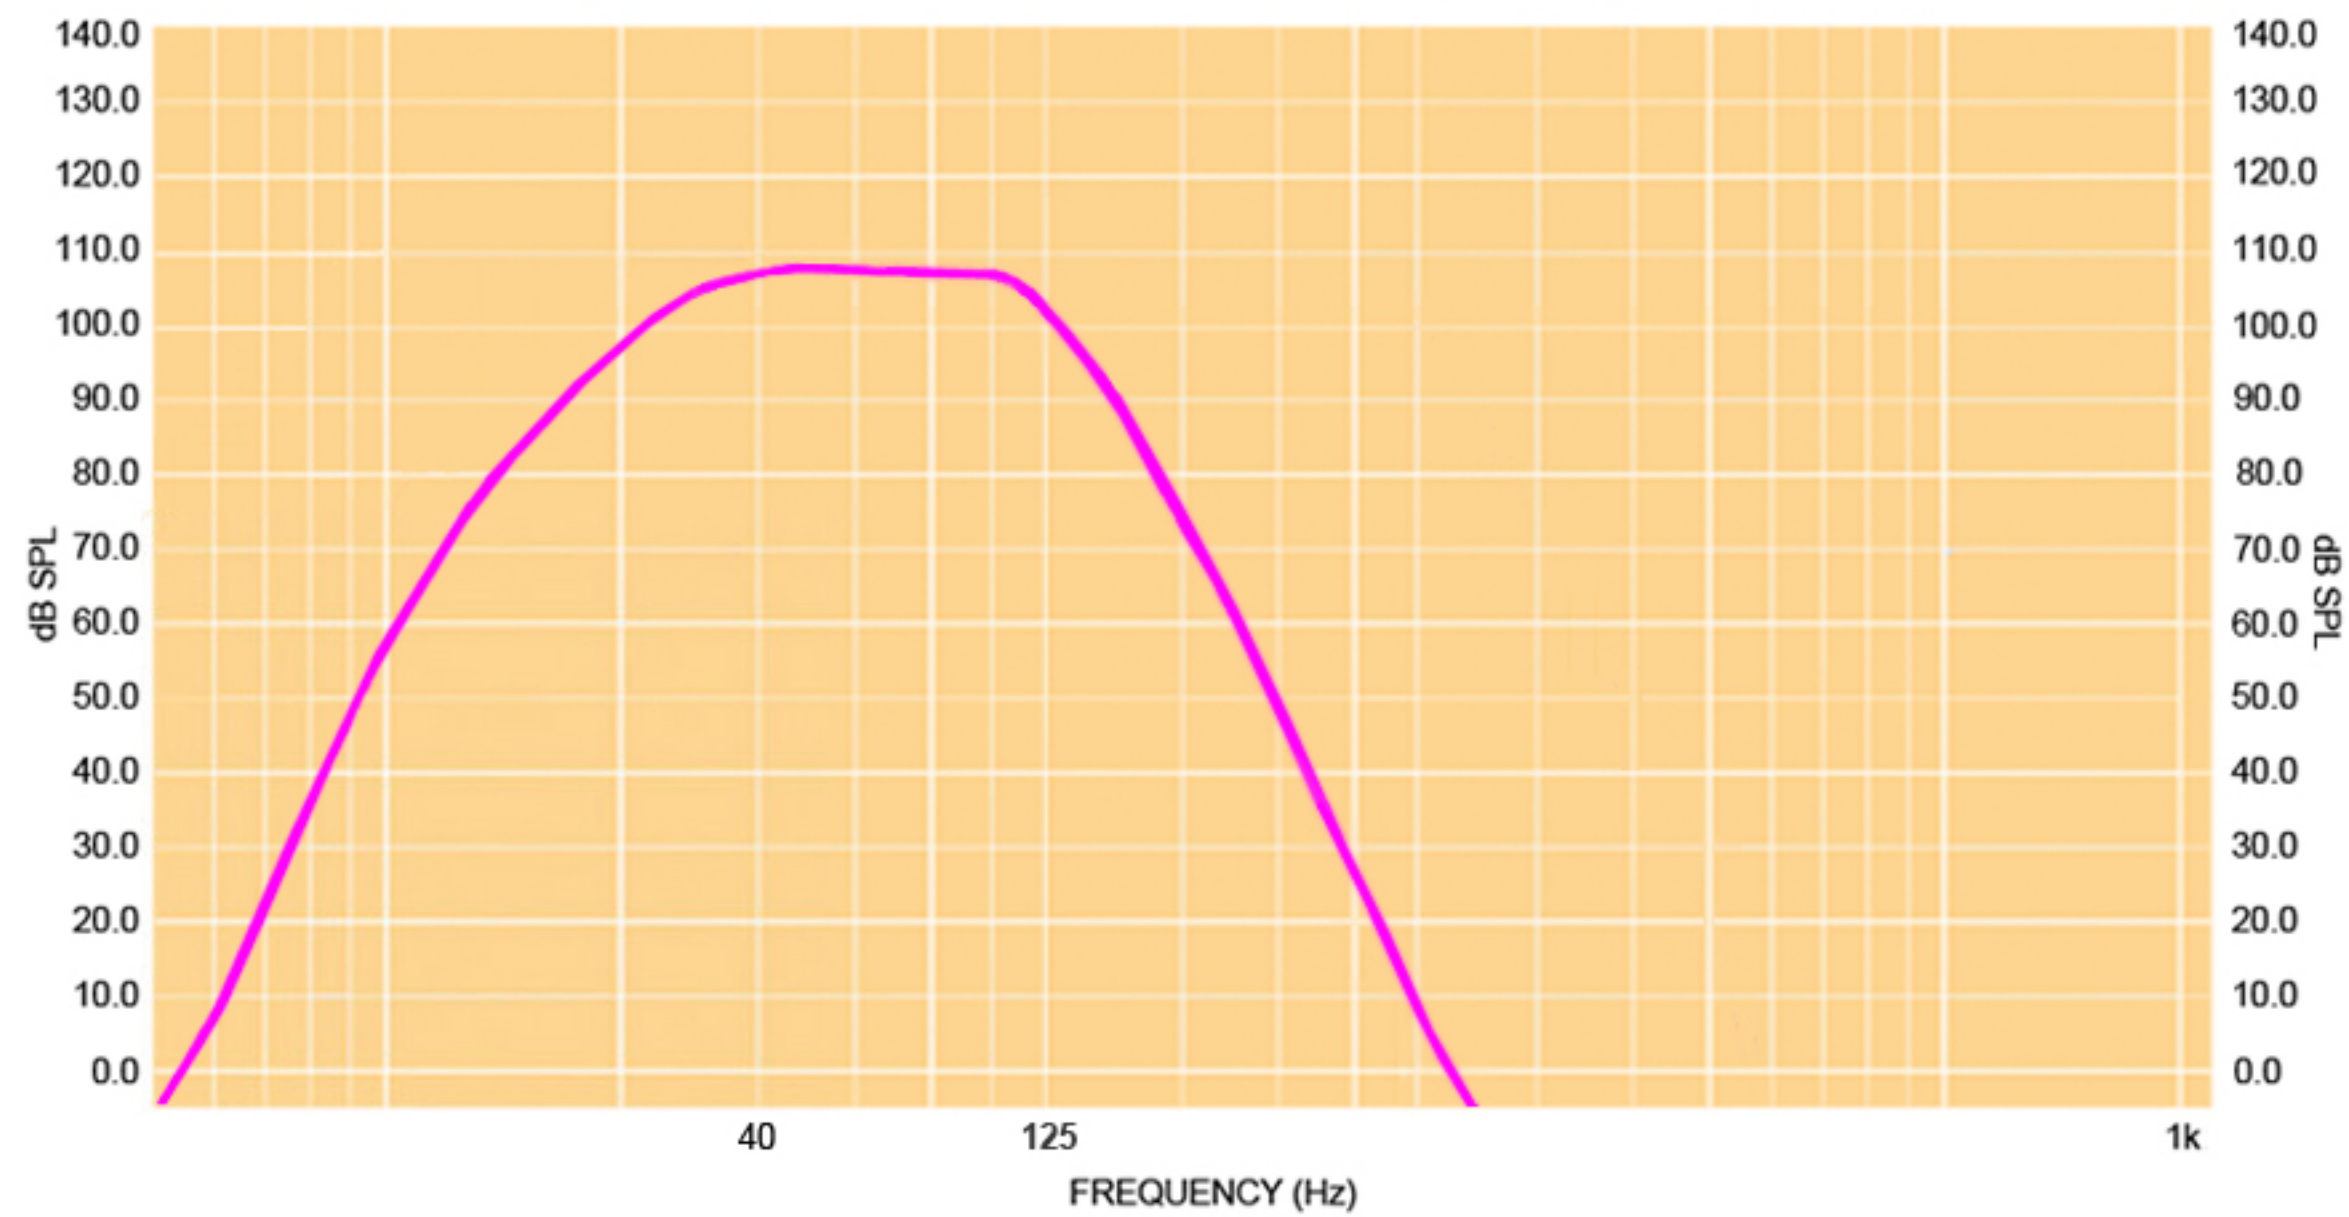



Pro DG Systems.

Urb. Rivera de San Luis. 21

14500. Puente Genil (Córdoba). Spain

Tlf: 678 548 947 607 290 698

www.prodgsystems.com